



L3HARRIS[®]
FAST. FORWARD.

MODEL H-412 ACOUSTO-OPTIC MODULATOR (AOM)

Radio frequency (RF) phase modulation capable AOM for optical wavefronts

The L3Harris Model H-412 AOM represents a significant departure from conventional AOM technology. By changing only the phase of the RF source waveform to modulate optical intensity, the H-412 AOM assures constant input power is always applied to the device regardless of data rate conditions. As a result, transient thermal conditions that occur with conventional AOM drive techniques are largely eliminated, and beam-pointing stability is significantly improved.

The H-412 AOM focuses light from a coherent optical source to a suitable beam waist within an optical medium, which is composed of low-loss, optical-grade tellurium dioxide crystal. The light is proportionally directed into a primary intense diffraction order at an angle that depends on the frequency of the applied RF source waveform. Advanced coherent transducer array technology, employed with precise digital drive technology, allows the H-412 AOM to be operated in either the RF phase modulation mode or a conventional on/off pulse RF mode for extended on/off contrast where beam-pointing stability is not critical. An L3Harris H-400 AOM series compatible driver and interface cable are required for operation.

PERFORMANCE PARAMETERS

PARAMETER	SPECIFICATION
Unless otherwise noted, all specifications are at 532 nm wavelength	
Minimum on/off contrast ratio	30 dB
Nominal center frequency (fc)	105 MHz
Deflection bandwidth	95–115 MHz
Total deflection angle	2.32 mrad
Minimum diffraction efficiency	>80% @ fc
Optical beam diameter	1 mm
Minimum rise time	30 ns (max) 0.15 mm (H)
Optical wavelength	488–800 nm
Optical material	Tellurium dioxide



APPLICATIONS


- > Optical modulation in visible and near-infrared (NIR) systems requiring the ultimate in beam-pointing stability
- > Predeflection, modulation, pointing adjustment and micromachining in visible and NIR laser systems

HIGHLIGHTS


- > Employs advanced coherent transducer array technology
- > Achieves excellent performance through use of high-frequency, bulk wave transducers and specialized fabrication techniques
- > Assures high reliability with high-vacuum application of alloy-bonded transducers and low-loss, ultrahard, multilayer, ultraviolet-qualified antireflective coatings

TYPICAL PERFORMANCE AT 532 NM USING H-401D DRIVER

The following plots show measured and/or simulated performance for the H-412 AOM when used with an H-400 AOM series compatible driver. See specifications for guaranteed performance characteristics and applicable wavelength.

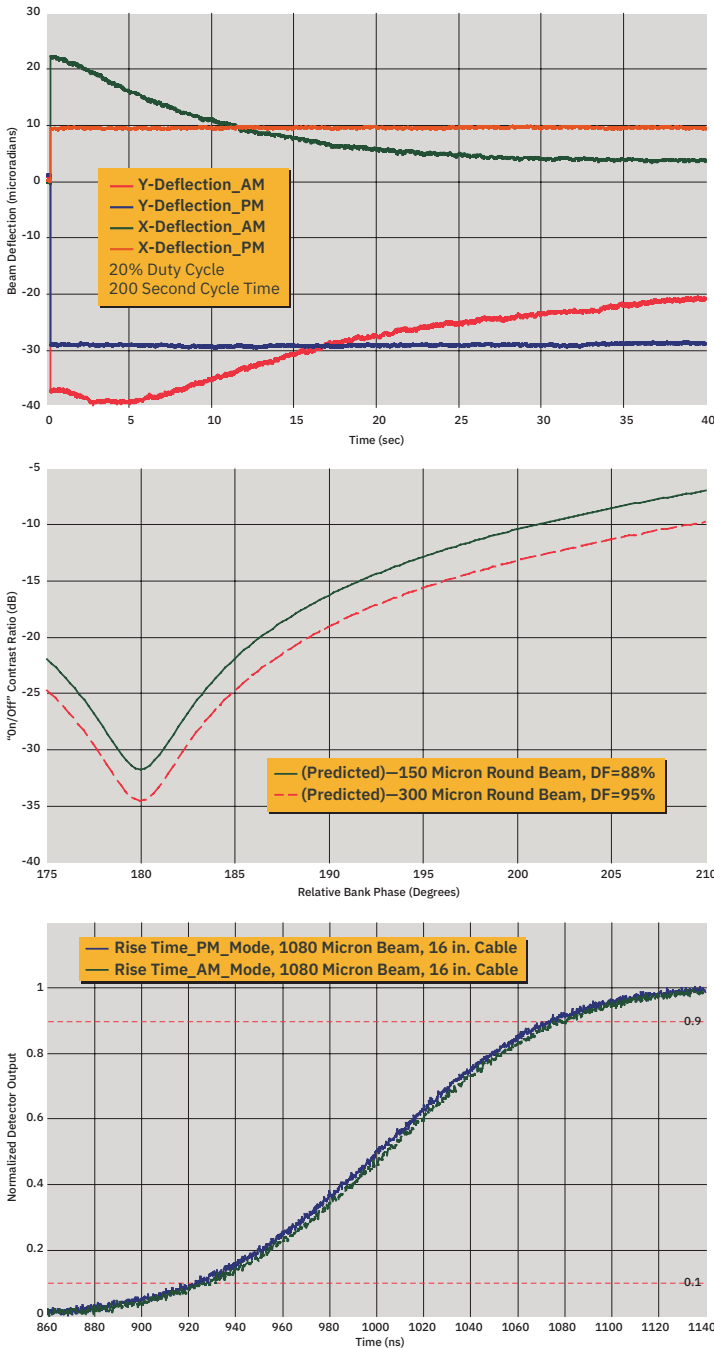


MECHANICAL CONFIGURATION

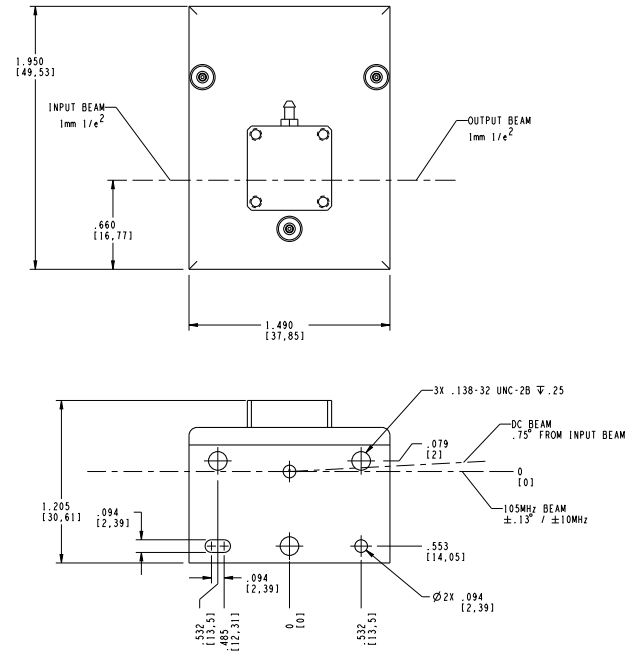

Part Ordering Configuration

H412-TE-WL-CF-MC-R

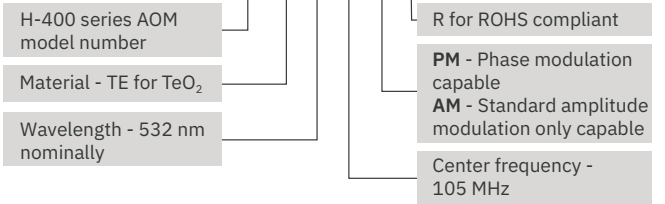

H412-TE-532-105-AM-R is the standard configuration. Please contact L3Harris for additional configurations. Requires H-400 AOM series compatible driver and cable. Specifications subject to change without notice.

For additional information, email Acousto-Optics@L3Harris.com or visit www.L3Harris.com/Acousto-Optics.

Model H-412 Acousto-Optic Modulator

© 2024 L3Harris Technologies, Inc. | 02/2024 | L24740

Non-Export Controlled Information

L3Harris Technologies is the Trusted Disruptor in the defense industry. With customers' mission-critical needs always in mind, our 50,000 employees deliver end-to-end technology solutions connecting the space, air, land, sea and cyber domains in the interest of national security.



1025 W. NASA Boulevard
Melbourne, FL 32919